


PVC insulated, PVC sheathed, telephone cable, JY (St) Y

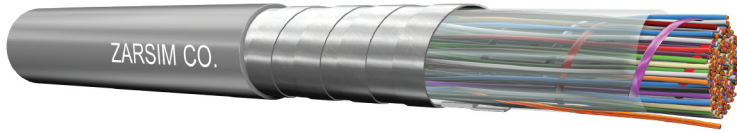

Application:

- For transmitting analogue or digital signals of telephone cables as well as standard modems of postal services, communication and paging systems, access control, time and data control systems. Not for laying underground.

Standard:

- VDE 0815
- TCI specification

Construction:

- Solid plain or tinned annealed copper conductor.
- PVC insulation , type TI 1 , YJ 1.
- Polyester type.
- Aluminum foil.
- PVC sheath type TM 1, YM 1.

General specification:

- Working temperature: Max. 70°C.
- Code designation: JY (St) Y.

PVC insulated, PVC sheathed, telephone cable, JY (St) Y

Cable size	Insulation thickness	Sheath thickness	Overall diameter	Weight Approx.
	mm	mm	mm	kg/km
2 x 2 x 0.6	0.2	0.6	4.8	35
4 x 2 x 0.6	0.2	0.6	5.9	54
6 x 2 x 0.6	0.2	0.6	6.7	71
8 x 2 x 0.6	0.2	0.6	7.4	88
10 x 2 x 0.6	0.2	0.6	8.0	105
15 x 2 x 0.6	0.2	1.0	9.3	145
20 x 2 x 0.6	0.2	1.0	10.4	184
25 x 2 x 0.6	0.2	1.1	12.0	250
30 x 2 x 0.6	0.2	1.2	12.7	273
40 x 2 x 0.6	0.2	1.2	14.2	350
50 x 2 x 0.6	0.2	1.2	15.6	426
70 x 2 x 0.6	0.2	1.4	18.4	592
100 x 2 x 0.6	0.2	1.4	21.4	686
2 x 2 x 0.8	0.25	1.0	5.6	48
4 x 2 x 0.8	0.25	1.0	7.0	79
6 x 2 x 0.8	0.25	1.0	8.0	108
8 x 2 x 0.8	0.25	1.0	9.0	136
10 x 2 x 0.8	0.25	1.0	9.8	163
15 x 2 x 0.8	0.25	1.2	11.9	240
20 x 2 x 0.8	0.25	1.2	13.3	307
30 x 2 x 0.8	0.25	1.2	15.7	438
40 x 2 x 0.8	0.25	1.2	17.7	567
50 x 2 x 0.8	0.25	1.4	19.9	712
70 x 2 x 0.8	0.25	1.4	23.0	967
100 x 2 x 0.8	0.25	1.4	26.9	1129